



GRABEX
windows

MANUFACTURER & INSTALLER ■ LONDON & SURROUNDING COUNTIES



CF72 BI-FOLDING DOORS

Design your perfect indoor-outdoor living



The slim design of the contemporary CF72 Sliding-Folding system, exceptional sizes and vast variety of configurations make them a perfect selection for any build (self-build), renovation and extension where flexibility, performance, great looks and ease of use are paramount for the lifestyle you desire.

With slim lines, slim interlocking sections, larger sizes and numbers of configurations than most of the other

doors on the market, CF72 offers great flexibility and design freedom for every project.

With CF72 sliding -folding system you are able to open up large chunks of walls, combine up to 14 panels and even open an entire corner of your home without a mullion! Create a perfectly balanced indoor-outdoor living spaces for your entire family for the years to come!

WINDOWS ■ DOORS ■ SLIDING SYSTEMS ■ BI-FOLDS ■ ROOFS

KEY FEATURES OF CF72 BI-FOLDS

- ✓ Freedom of design with up to 14 door panels
- ✓ Maximum height of up to 3m, maximum width of each panel up to 1.2m
- ✓ Flush threshold option for easy access
- ✓ Possibility to create open corner design without a post
- ✓ Option to hide sliding sashes into wall pockets
- ✓ Inward or outwards opening
- ✓ Outstanding thermal and acoustic performance
- ✓ Double- and triple-glazed options
- ✓ U_w from 1,1 (W/m^2K)
- ✓ 10 year manufacturer's guarantee


PAS 24 TESTED!

CF 72 Aluminium Bi-folding Doors are certified to PAS24:2012 and available with a burglar resistance class 2, offering you a high level of safety for your home.



"Great company to deal with as I ordered the doors with internal blinds myself. Not being in the trade the Lady I dealt with was excellent and talked me through the process. She was also extremely helpful afterwards with my questions. Would highly recommend."

Gregor, Trustpilot

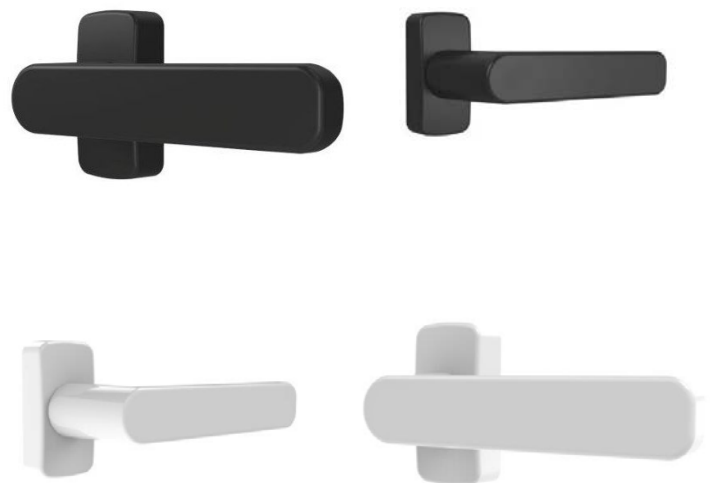

TECHNICAL & PERFORMANCE

Maximum element height: 3000 mm
Maximum element width: 1200 mm
Maximum weight of panel: 120 Kg

Finishes:


Powder coating in variety of RAL colours with textured coatex and metallic options;
Wood effect powder coating;
Anti-bacterial powder coating;
Anodised;
Dual colour options.

Security Test (PAS 24: 2012): Passed Reference test 2701 x 2517 mm. 3 sashes Set-up: 330

Transmittance: U_w from 1,1 (W/m^2K)
Acoustic insulation: Maximum glazing: 34 mm
Air permeability (EN 12207:2000) CLASS 4
Water tightness (EN 12208:2000) CLASS 9A
Wind resistance ((EN 12210:2000) CLASE A3
Reference test 2.70 x 2.53 m. 3 sashes

Maximum glazing thickness: 45mm
Sections: Frame – 73 mm / Sash – 73 mm
Sash : 69 mm

Profile thickness: Door 1,8 mm
Polyamide strip length: Frame 20 mm / Sash 30 mm

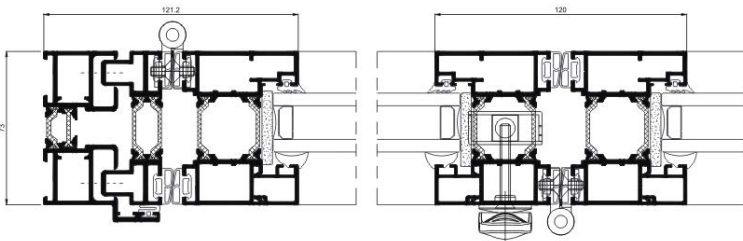

With the design combinations of up to 14 panels, outside and inside opening, and an open corner option without fixed post, you can rest assured CF72 bi-folding doors will seamlessly suit the space in which you're hoping for them to fit. With either even or odd number of panels you're bound to create a perfect design tailored to your lifestyle and needs.

CF72 offers an exceptional level of performance all year round! You'll find yourself mesmerised by the smooth and effortless functionality of this door - they're sturdy and rigid, able to withstand even the harshest weather conditions, but operate effortlessly offering you ease of access and smooth operation. Suitable for a variety of homes, you'll be more than happy with the quality of your new bifolding doors!





GET INSPIRED!



**ORPINGTON SHOWROOM
HEAD OFFICE & FACTORY**

Grabex Business Centre,
Murray Road, Orpington, BR5 3QY
7am - 5pm weekdays
9am - 2pm Saturdays